

CERAMIC WALL TILE

PLAIN (GLOSSY & MATT)

Starco introduces to you a solitary gem, an amalgamation of color and exotic designs. This assemblage is sort in order to fulfill the need of the hour of both domestic and cosmopolitan market. A definite eye-turner, and eye-catching extravaganza.

75X 300 MM

All of our products can endure harsh conditions and are long lasting as they are personally matured under stern scrutiny. Each and every design is developed under fully automatic Italian machineries. All of our best efforts are teamed together to achieve unparalleled results.

The management at STARCO has been maintaining its top game. They are highly professional, competent, and accomplished to attain the vision of making STARCO the most trusted brand in the tiles industries.

AN AMALGAMATION OF

COLOR & EXOTIC DESIGNS

Glossy Surface

8 PLAIN COLORS


Redefine your space with the glorious glossy surfaces that give free rein to your imagination.

Matt Surface 3 COLORS

Let the incredible vibrancy of matt surfaces transform your room into a sumptuous heven.



75X300MM

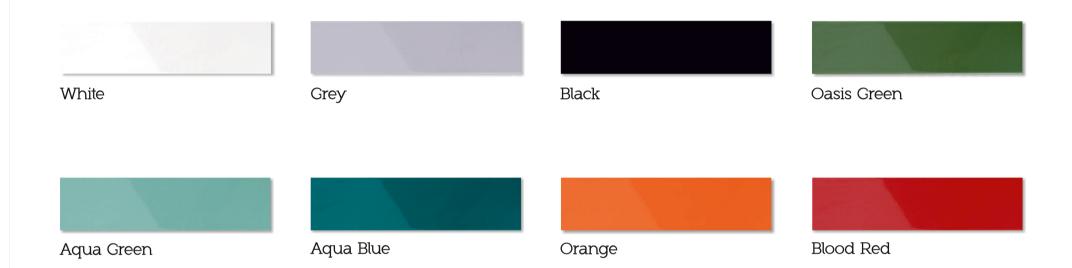











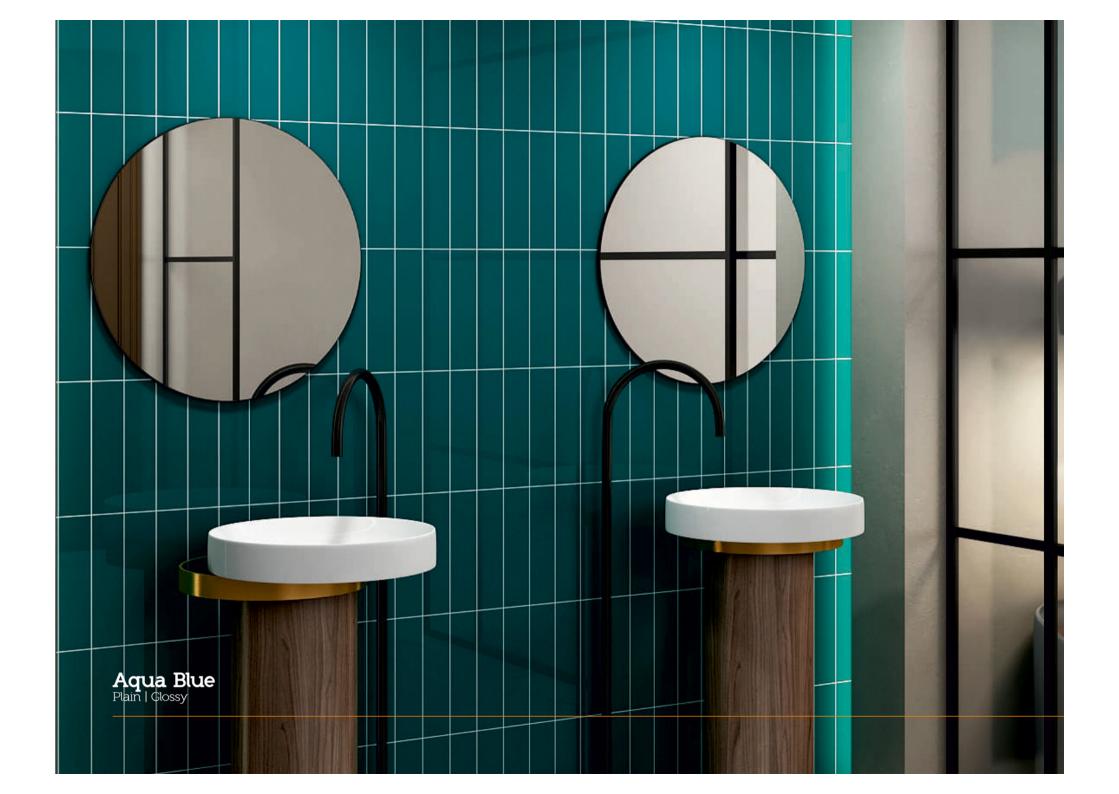



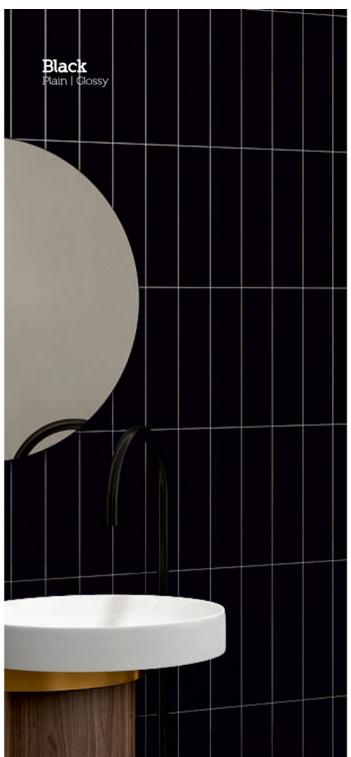



SIZE **75X300MM 3X12INCH**

Grey

White



Black











TECHNICAL SPECIFICATION as per ISO 13006:2018 - ANNEXL

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.15%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 2.65%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.25%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.28%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.20%	ISO-10545-2
5	Water Absorption	>10%	14.04%	ISO-10545-3
6	MOR	Mlnimum 12 N/mm3	20.09 N/mm3	ISO-10545-4
7	Breaking Strength	Minimum 600 N	650.99 N	ISO-10545-4
8	Surface Quality	Minimum 95%	100%	ISO-10545-2
9	Density (g/cc)	Minimum 2.2	2.2423 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GB (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11
12	Thermal Shock Resistance	10 cycle	10 cycle (PASS) Fully Resistance	ISO-10545-9
13	Coe ☐ cient of Liner Thermal Expansion	Maximum 9 x 10 -6	5.92 x 10 -6	ISO-10545-8
14	Small colour di lerences (Plain Colour Tiles)	GL < 0.75	GL < 0.55	ISO-10545-16
15	Resistance to Staining	Min Class - 3	Class 4	ISO-10545-14
16	Resistance to Low Concentration of Acid & Alkali	Class GLA	Class GLA	ISO-10545-13
17	Resistance to Low Concentration of Acid & Alkali	Class GHA	Class GHA	ISO-10545-13
18	Household Chemical Resistance	Minimum Class B	Class GA	ISO-10545-13
19	Swimming Pool Salt	Minimum Class B	Class GA	ISO-10545-13
20	Lead and Cadmium Release	Maximum 0.1mg/dm2	0.012mg/dm2	ISO-10545-15

PACKAGING DETAILS

SIZE	TEXTURE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
75X300MM (3"X12")	PLAIN	8.00MM	44	0.99	10.66	13.500

Note:

- Size / shade variation is inherent in ceramic tiles, in case of any complain its should be brought to our dealer's notice before laying the tiles.
- colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.











